



WALL

BUILT-IN

stainless
STEEL

aluminum

I.T.

WALL BUILT-IN

| | |
|-----------------------------|-----------------|
| Supply | 230 V - 50 Hz |
| Absorbed power | 18,4 W - 0,08 A |
| Inlet water pipe | Ø5/16" (8 mm) |
| Dispensing area height (mm) | 290 |
| Typology | Wall mounting |
| Net weight (kg) | 7 |
| Gross weight (kg) | 8 |
| Dimensions W x D x H (mm) | 306 x 110 x 545 |
| Packaging dimensions (mm) | 320 x 170 x 950 |

| | |
|--------------------|--|
| Dispensing options | WALL 1: Cold still water WALL 2: Cold still water, sparkling cold water |
| Materials | Stainless steel frame Front panel in anodized aluminum High quality professional valve |


OTHER CHARACTERISTICS

Easily connected to any type of under-counter refrigerator that has already been installed
WALL can be connected to the cooling unit that has been placed at distance.

OPTIONAL

| | |
|--------------|---------------------|
| Filters | UV LED OUT (inside) |
| Wall support | ✓ |

For a proper installation of the system, the use of the WATER BLOCK is compulsory.

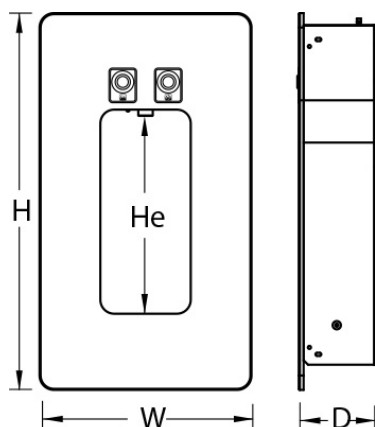

CERTIFICATIONS



DM 174/04

