



ALWAYS COOLER













R290



Cooling



Bank



Saving



COMPACT, SIMPLE AND HIGH PERFORMING, BLUBAR IS THE WATER DISPENSER FOR GREAT PERFORMANCE. PERFECT FOR PROFESSIONAL USE.

As a result of two different cooling technologies, Blubar is the professional and high performing choice in all "capacities".

Blubar gives the best user experience for hoteliers and restaurant owners who require a solid, elegant and convenient dispenser. Blupura professional equipment is synonymous with simplicity, functionality and reliability together with energy saving for hospitality industry professionals.





# "Beer Tap"

Blubar is available with the option of manual mechanical taps which enable the filling of two bottles at the same time.




## Inox Touch

Blubar adapts to every dispensing "style". Featuring "lnox Touch" high-quality steel buttons, highly professional and customizable with a "portion control" option.



### Cabinet

Two different types of design cabinets are available, designed with style and functionality. Both the models are made of stainless steel, with adjustable feet and a bracket for securing filters inside the cabinet. As an option, it is possible to install the tank alarm, which is the 5-litre tank fitted with fill level alarm.

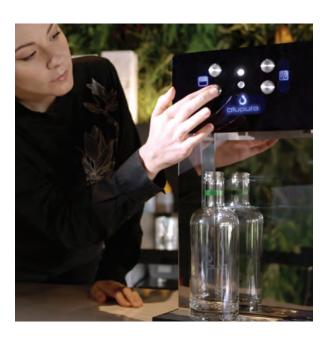

## Portion Control

High-quality stainless steel dispensing buttons provide a more accurate water supply, as well as the volumetric portioning, which enables the customization of the amounts delivered, for a convenient, rapid service.





435		Fizz	Ambient	Cold	Portion Control	Dispensing	Weight	Dimensions
7	Lt./h					area He (mm)	(kg)	W x D x H (mm)
BLUBAR "Beer tap" 30	30		•	•		320	24	318 x 537 x 567
BLUBAR "Beer tap" 30 Fizz	30	•		•		320	26	318 x 537 x 567
BLUBAR "Beer tap" 60	60		•	•		320	22	318 x 537 x 567
BLUBAR "Beer tap" 60 Fizz	60	•		•		320	27	318 x 537 x 567
BLUBAR "Beer tap" 80	80		•	•		320	33	360 x 565 x 566
BLUBAR "Beer tap" 80 Fizz	80	•		•		320	35	360 x 565 x 566
BLUBAR "Beer tap" 150	150		•	•		329	43	460 x 606 x 617
BLUBAR "Beer tap" 150 Fizz	150	•		•		329	44	460 x 606 x 617
BLUBAR I.T. 60	60		•	•	Optional	312	25	318 x 537 x 491
BLUBAR I.T. 60 Fizz	60	•		•	Optional	312	27	318 x 537 x 491
BLUBAR I.T. 60 Fizz 3W	60	•	•	•	Optional	312	27	318 x 537 x 491
BLUBAR I.T. 80	80		•	•	Optional	328	30	360 x 565 x 566
BLUBAR I.T. 80 Fizz	80	•		•	Optional	328	35	360 x 565 x 566
BLUBAR I.T. 80 Fizz 3W	80	•	•	•	Optional	328	35	360 x 565 x 566
BLUBAR I.T. 150	150		•	•	Optional	337	41	460 x 606 x 617
BLUBAR I.T. 150 Fizz	150	•		•	Optional	337	44	460 x 606 x 617

### OPTIONAL EXTRAS

Filter + Head



UVC Led In

Outlet filters

In-line filters

UVC Led Out (only for I.T. models)





Nano Silver Pipe (only for I.T. models)



Bluprotection



Water Block

(to ensure correct installation, the water block is essential on the "beer tap" version)



BLUBAR Tray with outlet (standard for the 30/60 Lt/h. versions)

### **ACCESSORIES**



BLUBAR Cabinet 30 - 60

BLUBAR Cabinet 80



 $5\ \text{Lt.}$  tank with re-fill alarm



Water pressure reducer



 $\mbox{CO}_2\;$  pressure reducer with 2 pressure gauge (only for Fizz models)

Incremental digital litre-counter 6000R




Decremental digital litre-counter 8000T

or

Mechanical litre-counter

TECHNICAL PROFILE	BLUBAR "Beer tap" 30 Fizz	BLUBAR "Beer tap" 60 Fizz BLUBAR I.T. 60 Fizz	BLUBAR "Beer tap" 80 Fizz BLUBAR I.T. 80 Fizz	BLUBAR "Beer tap" 150 Fizz BLUBAR I.T. 150 Fizz
Cooling capacity	30 (Lt/h.)	60 (Lt/h.)	80 (Lt/h.)	150 (Lt/h.)
Temperature of cold water*	5° - 12° C			
Ice bank capacity (Lt)	-	7	14	18
Ice bank (Kg)	-	3	5	8
Cooling technology	Dry Cooling	Ice Bank Single Stainless Steel coil	Ice Bank Single Stainless Steel coil	Ice Bank Double Stainless Steel coil
Cold water coil	Stainless steel AISI 316			
Cooling	Forced ventilation	Forced ventilation	Forced ventilation	Forced ventilation
Adjustable thermostat	Yes	Yes	Yes	Yes
Refrigerant gas	HC R290	HC R290	HC R290	HC R290
Professional carbonation pump	Membrane	Membrane	Rotary	Rotary
Power supply	230 V - 50 Hz			
Power consumption	230 W	276 W	530 W	875 W
Max absorption	1 A	1,57 A	2.3 A	3,8 A
Ambient cooling temperature	Min 16°C - Max 32°C			
Materials	Parts made of robust stainless steel Plexiglas cover panel			

\*estimated at an ambient temperature of 25°C and an incoming water temperature of 20°C  $\,$ 

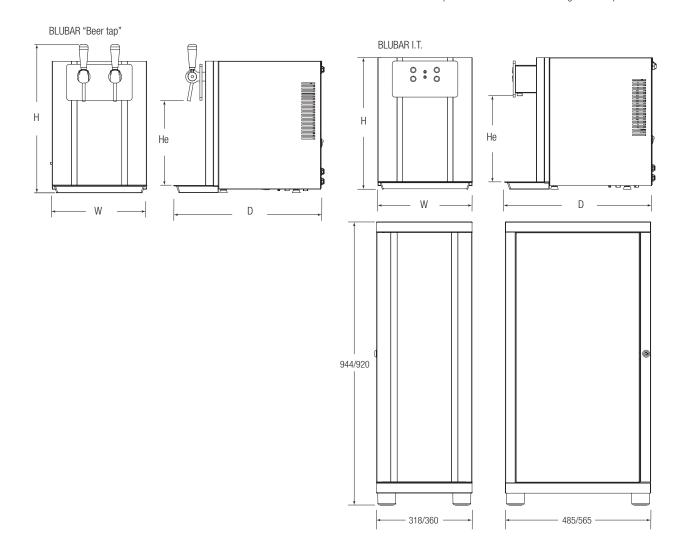



ALWAYS COOLER

Blupura S.r.l. - Via Volponi, 11 - 62019 Recanati (Mc) - Italy
Tel. +39 071 971 0080 - info@blupura.com
Blupura Usa - 1200 Brickell Ave, Suite 1950 - Miami (FL) 33131 - USA - Tel. +1 305 777 3591 - blupurausa@blupura.com
www.blupura.com

