


# BLBar

**60**  
lt/h

  
Gas  
R290

  
Ice  
Bank

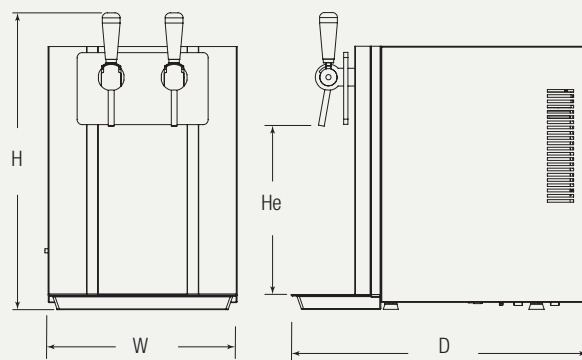

	"Beer tap" 60 Fizz	"Beer tap" 60
Cooling capacity [L/h]	60	
Specifications	CS	CA
Power supply	230V - 50Hz	
User Interface Group	Beer Tap	
Pump	Membrane Carbonation Pump	n/a
Cooling Technology	Ice Bank - Single Coil	
Ice Bank Capacity [Lt]	7	
Ice Bank [Kg]	3	
Condensation	Ventilated Condensation	
Max. Hot Water Temperature	n/a	
Boiler capacity [Lt]	n/a	
Boiler Power [W]	n/a	
Rated Compressor Power [HP]	1/8	
Power Consumption [W]	300	290
Max. Current Draw [A]	1,4	1,3
Water Connection [mm]	8	

	"Beer tap" 60 Fizz	"Beer tap" 60
CO <sub>2</sub> Connection [mm]	8	n/a
Dispensing Area Height He [mm]	322	
Version	Countertop	
Net weight [Kg]	26	25
Gross weight [Kg]	30	28
Dimensions WxDxH [mm]	318x537x567	
Packaging dimensions WxDxH [mm]	390x600x590	
Material	Stainless steel; plexiglass	
Alarms	n/a	
Other features	n/a	

#### Installation Requirements

Inlet water pressure	Max. 3,5 bar
Operating CO <sub>2</sub> pressure	3,5 - 4 bar
Temperature of the operating ambient	Min. 16°C - Max. 32°C
Certifications	<a href="https://www.blupura.com/en/product/blubar-beer-tap/">https://www.blupura.com/en/product/blubar-beer-tap/</a>



**Blupura S.r.l.** - Italy Tel. +39 071 971 0080  
info@blupura.com - www.blupura.com

**Blupura Usa** - USA Phone +1 305 777 3591  
blupurausa@blupura.com - www.blupura.com

Given the continuous technological evolution, Blupura reserves the right to improve or modify the products listed in this technical sheet without prior notice.